
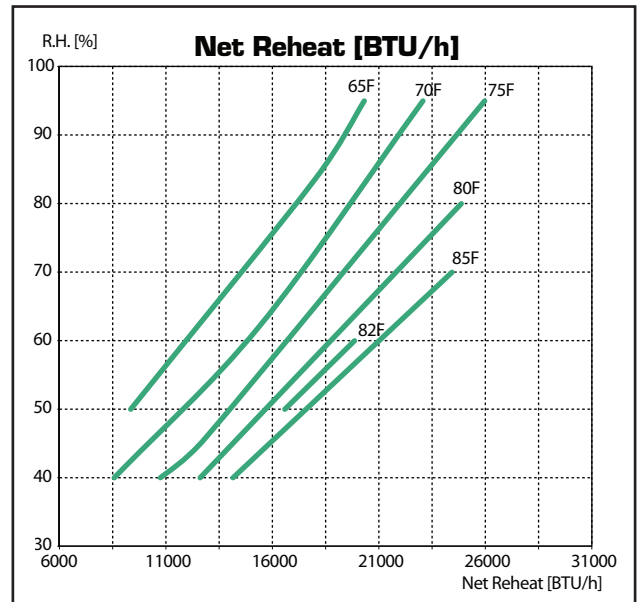
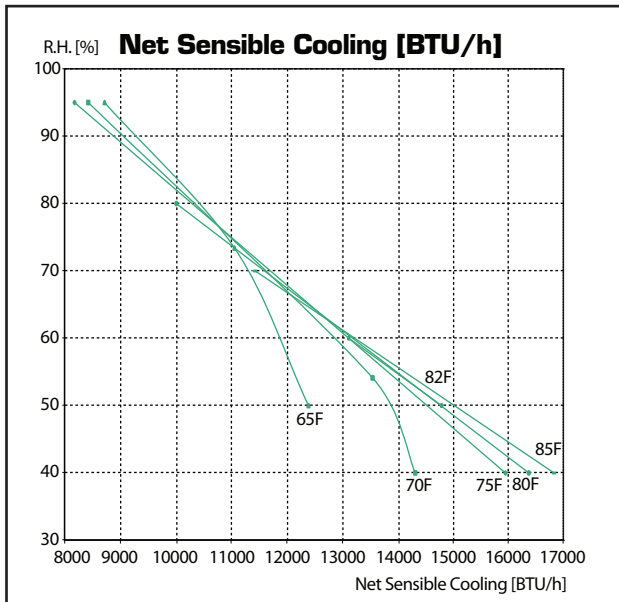


**DCA 900T AIR COOLED - NON WATER HEATING DEHUMIDIFIER**

**DCA 900TWH WATER HEATING ASSIST DEHUMIDIFIER**

**PERFORMANCE**

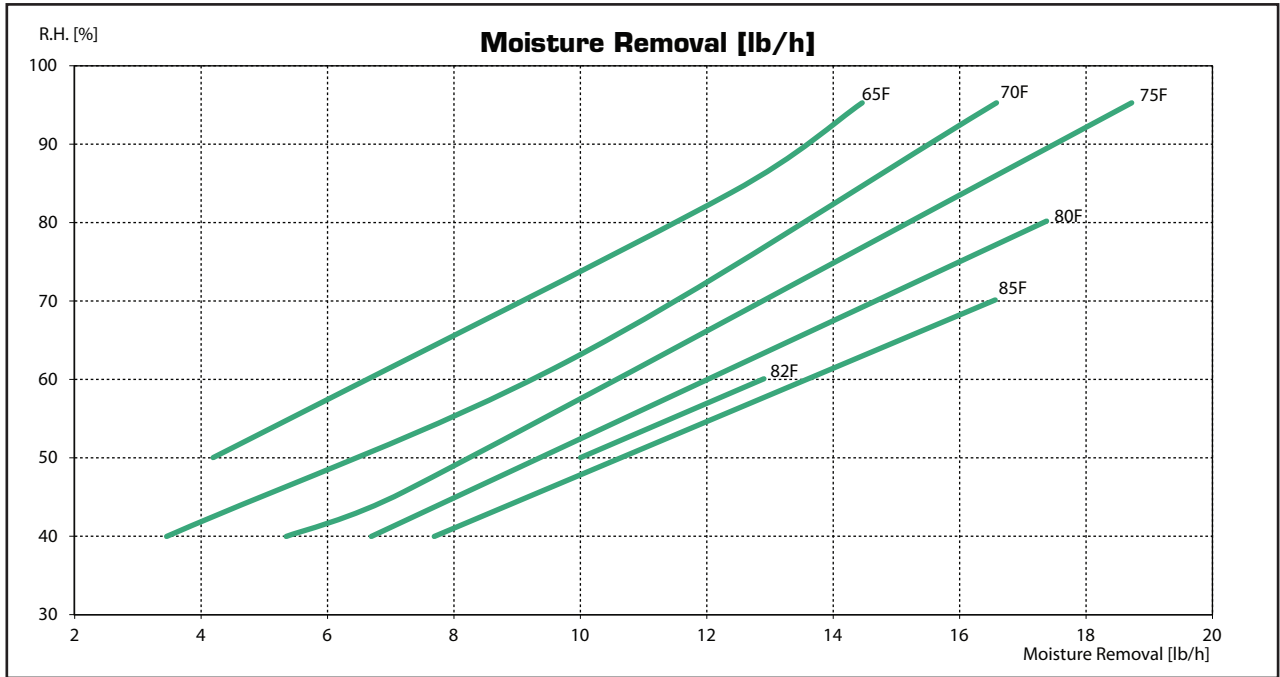

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	10.0	12.9	1
Net Sensible Cooling, MBH	14.8	13.1	2
Net Reheat, MBH	16.6	19.9	3
Water Heating, MBH (Water Heating Models Only)	31.5	33.1	4

**Notes:**

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote condenser at 95F.
3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

## DESIGN SPECIFICATIONS

Electrical	208/230V	208/230V	460V
Phase/Hz	1/60	3/60	3/60
Compressor B.T.U.	25,100	25,200	26,400
Compressor RLA	12.2	7.7	3.8
Compressor LRA	67	55	27
Blower Motor H.P.	0.5	0.5	0.5
Blower Motor FLA	4.4	2.0	1.0
Unit FLA	18.0	11.1	6.1
Maximum Fuse Size	30	17.5	10
Minimum Circuit Ampacity	21.1	13.0	7.1
Unit Operating KW	2.91	2.76	2.87

CFM.....	950
External Static Pressure .....	0.50" H <sub>2</sub> O
Refrigerant.....	R-407C (Factory Charged 18 lbs.)
Compressor Type .....	Scroll
Filter (Quantity: 1) .....	20" x 25" x 1" Fiberglass
Drain Connection .....	1" Bar Drain
DCA 900T Weight.....	420 lbs.
DCA 900TWH Weight .....	475 lbs.
Liquid Inlet [inches O.D.] (up to 50') <sup>1</sup> .....	0.375
Hot Gas Outlet [inches O.D.] (up to 50') <sup>1</sup> .....	0.625
Water Inlet [inches O.D.].....	0.75
Water Outlet [inches O.D.].....	0.75
Water Flow G.P.M. <sup>2</sup> .....	4.5
Pressure Drop (Ft. WC) <sup>2</sup> .....	8.4

<sup>1</sup> Over 50ft contact factory

<sup>2</sup> Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

## STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Single Refrigeration Circuit
- Single Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control

- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System (WH Models Only)
- ElectroFin Coated Coils

## OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Extended Surface Filters 2" & 4"
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available

- Motorized Evaporator Bypass Damper
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available