


DCA 11000 STANDARD DEHUMIDIFIER


DCA 11000WH WATER HEATING DEHUMIDIFIER

PERFORMANCE

Moisture Removal LB/HR (see note 1)

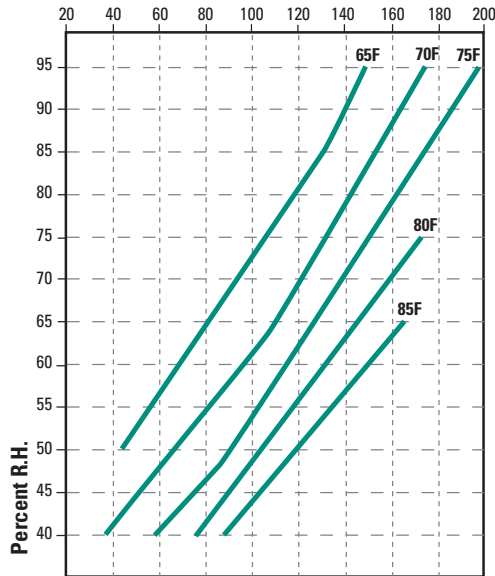

Net Reheat, MBH (see note 3)

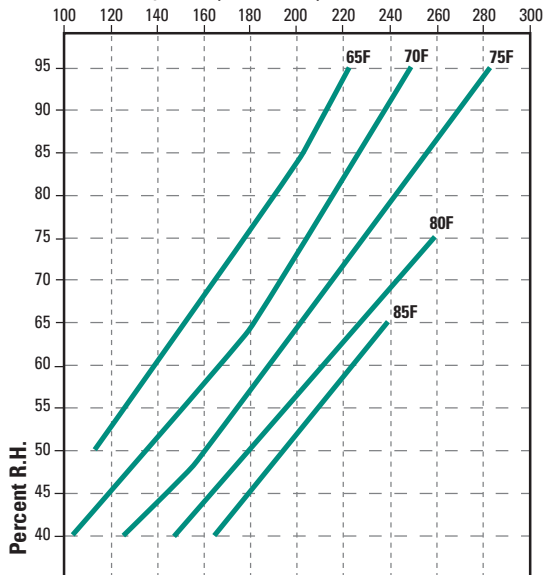

FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Dual Refrigeration Circuit Construction
- Dual Copeland Scroll Compressors
- Motorized Evaporator By-Pass Control
- Low Ambient Head Pressure Control
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- Water Cooled Condenser For Water Heating Or A/C Available
- Many Other Options Available
room heating while dehumidifying (see specifications).


Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal LB/HR	110.5	139.8	1
Sensible Cooling, MBH	172.0	156.9	2
Net Reheat, MBH	188.9	222.2	3
Water Heating - A, MBH	133.3	139.7	4, 6
Water Heating - B, MBH	234.6	245.9	4, 6

Notes:

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote air cooled condenser at 95°F ambient.
3. Defined as sum of latent and compressor input. Use Dehumidifier for supplemental heat only.
4. Assuming 80°F entering water temperature.
5. For conditions and data not shown contact the Factory
6. For pool water usually only circuit A is required.

DCA11000 STANDARD DEHUMIDIFIER DCA11000WH WATER HEATING DEHUMIDIFIER

DIAGRAMS

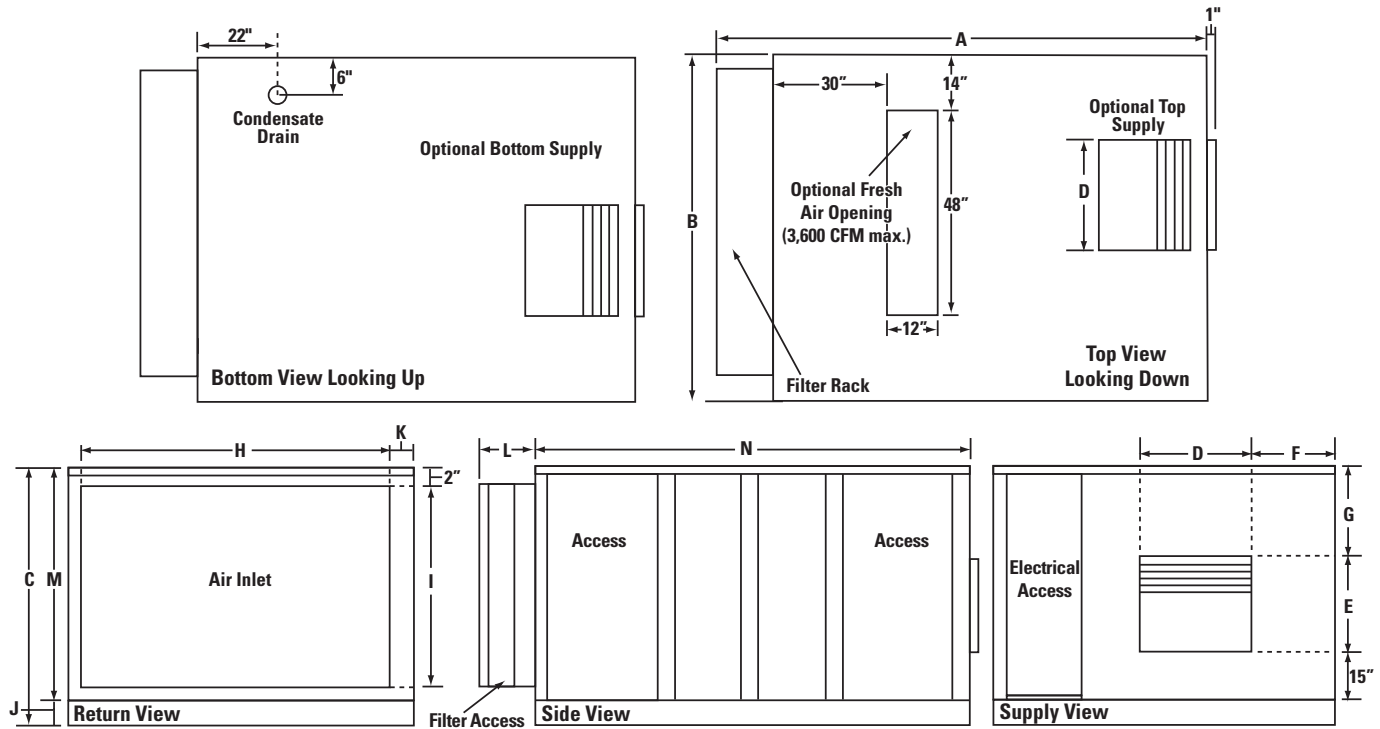

PHYSICAL DIMENSIONS

DCA11000									
A	136 1/2	D	30	G	25 1/2	J	3	M	69
B	77	E	30	H	70 1/2	K	4	N	127
C	72	F	18	I	60 1/4	L	9 1/2		

DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor M.B.H. A/B	108/190	108/190	108/190
Compressor RLA A/B	34.3/55.2	17.5/27.2	13.2/24.3
Compressor LRA A/B	232/425	125/187	100/148
Blower Motor H.P.	7.5	7.5	7.5
Blower Motor FLA	19.8	9.9	7.8
Unit FLA	98.8	48.7	40.1
Maximum Fuse Size	150	80	70
Minimum Circuit Ampacity	124.9	62.4	52.3
Operating kW	27.1	27.1	27.0

CFM	10,850	DCA11000 Weight	4,760 lbs.
External Static Pressure	.050" H ₂ O	Water Inlet O.D. A/B	1.375/1.625
Refrigerant R-22 Chare A/B	.55lbs./80lbs.	Water Outlet O.D. A/B	1.375/1.625
Compressor Type	Scroll	Water Flow G.P.M. A/B	17.0/36.0
Filter 9 each	.20" x 24" x 4" pleated	Pressure Drop (Ft. WC) A/B	.6.7/12.4
Drain Connection	.1" Bar Drain		

*Weight shown is for basic unit with no options.
Contact factory for weight with options needed.

Above data based on 50% RH + Return Air 82°F and Pool Water at 80°F

OTHER INFORMATION

OPTIONS: (Consult Factory)

- Right Side Component Access
- Top or Bottom Discharge
- Outdoor Installation Package
- Outdoor Air Assembly with
- Damper & Filter Make Up
- External Static Upgrade
- Heresite Coated Coils
- Motorized Bypass Damper
- Remote Ready Delete
- Defrost Timer Package
- Other

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only.

The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier.

Ratings are subject to change without notice.

W53 N550 HIGHLAND DRIVE
P.O. BOX 0917
CEDARBURG, WI 53012
PHONE: 262-377-7501
FAX: 262-377-7502
E-MAIL: info@dehumidifiercorp.com

DCA DEHUMIDIFIER
CORPORATION
OF AMERICA

WEBSITE: www.dehumidifiercorp.com