
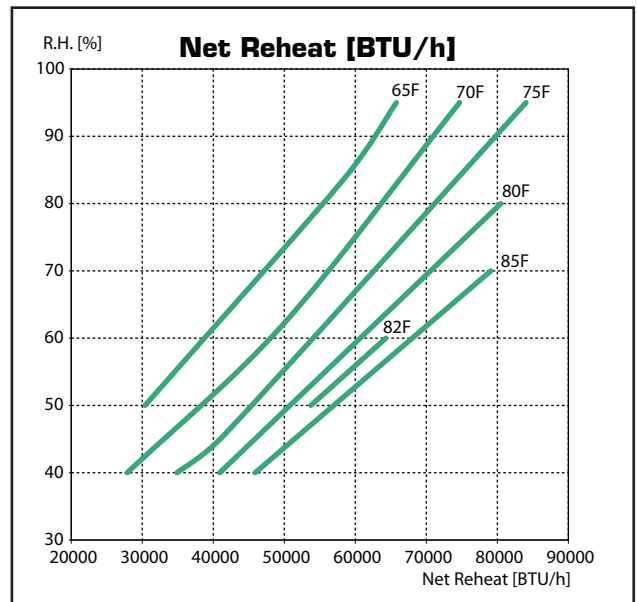
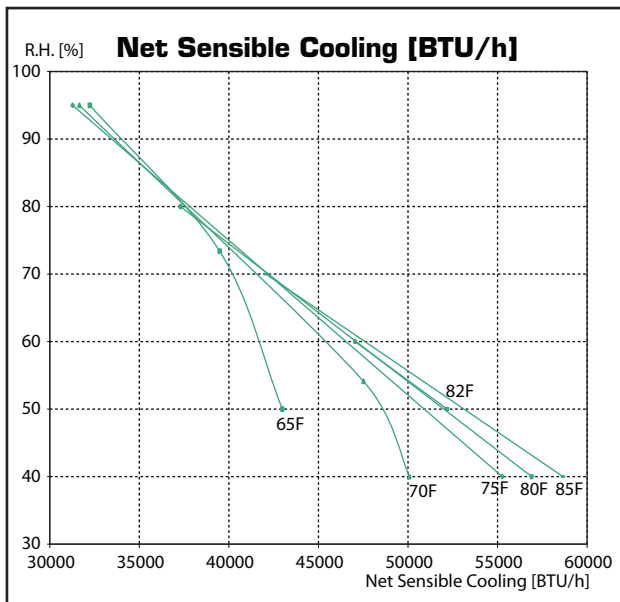


**DCA 3300T AIR COOLED - NON WATER HEATING DEHUMIDIFIER**

**DCA 3300TWH WATER HEATING ASSIST DEHUMIDIFIER**

**PERFORMANCE**

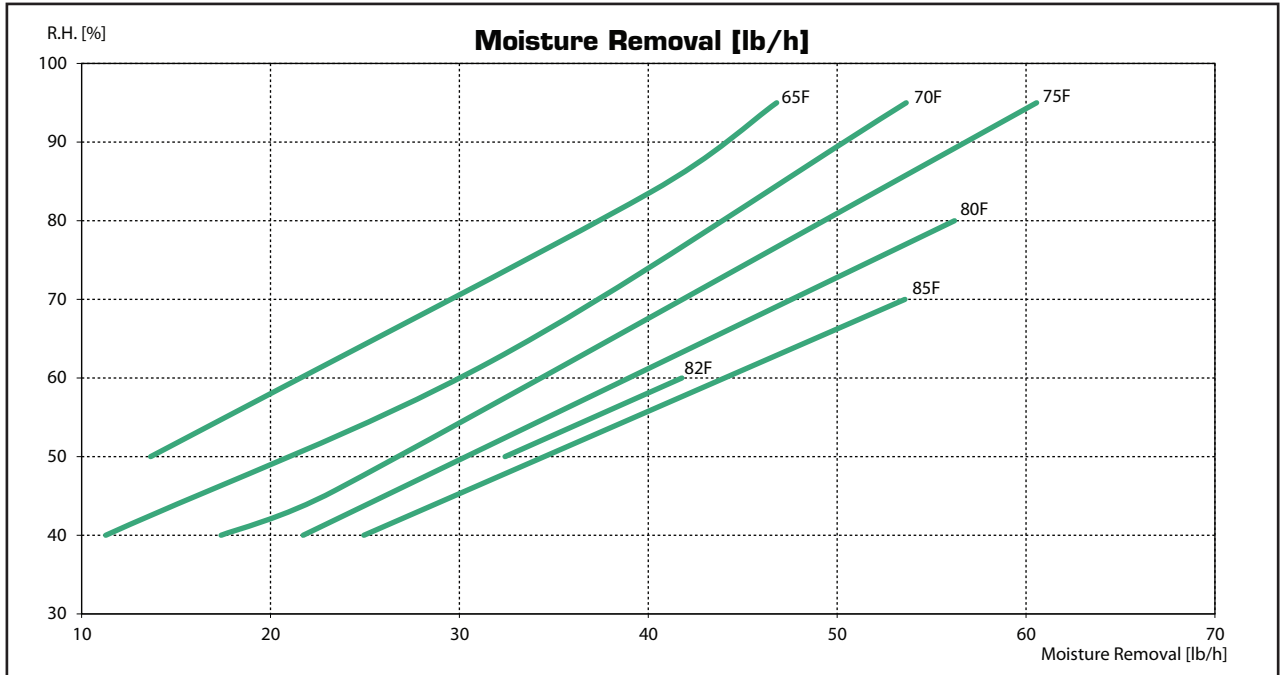

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	32.4	41.8	1
Net Sensible Cooling, MBH	47.8	42.4	2
Net Reheat, MBH	53.7	64.3	3
Water Heating, MBH (Water Heating Models Only)	102.0	106.9	4

**Notes:**

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote condenser at 95F.
3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

## DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor B.T.U.	81,500	81,500	81,500
Compressor RLA	25.6	12.8	8.7
Compressor LRA	196	100	90
Blower Motor H.P.	2.0	2.0	2.0
Blower Motor FLA	6.2	3.1	2.4
Unit FLA	33.5	16.7	13.6
Maximum Fuse Size	60	30	20
Minimum Circuit Amp.	39.9	19.9	15.8
Operating kW	8.22	8.22	8.19

CFM.....	3300
External Static Pressure .....	0.50" H <sub>2</sub> O
Refrigerant.....	R-407C (Factory Charged 40 lbs.)
Compressor Type .....	Scroll
DCA 3300T Filter (Quantity: 2).....	20" x 25" x 1" Fiberglass
DCA 3300TWH Filter (Quantity: 4).....	20" x 25" x 1" Fiberglass
Drain Connection .....	1" Bar Drain
DCA 3300T Weight .....	900 lbs.
DCA 3300TWH Weight .....	1100 lbs.
Liquid Inlet [inches O.D.] (up to 50') <sup>1</sup> .....	0.625
Hot Gas Outlet [inches O.D.] (up to 50') <sup>1</sup> .....	0.875
Water Inlet [inches O.D.].....	1.375
Water Outlet [inches O.D.].....	1.375
Water Flow G.P.M. <sup>2</sup> .....	15.0
Pressure Drop (Ft. WC) <sup>2</sup> .....	8.2

<sup>1</sup> Over 50ft contact factory

<sup>2</sup> Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

## STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Single Refrigeration Circuit
- Single Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control

- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- ElectroFin Coated Coils

## OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Extended Surface Filters 2" & 4"
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available

- Motorized Evaporator Bypass Damper
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available

